



28
28
28

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Re Application of

JENKINS, Charles Roderick et al.

Serial N°: 10/734,394

Filed: December 12, 2003

For: SYSTEM AND METHOD FOR WELLBORE
COMMUNICATION

§
§
§
§
§
§
§
§
§

Group Art Unit: 2857

Examiner: N/A

Attorney Docket N°: 57.0517 US NP


SUBMISSION OF PRIORITY DOCUMENT

MS Missing Parts
Honorable Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

Sir:

Attached hereto is United Kingdom Patent Application No. 0229328.0, filed 14 December 2002, for the above-captioned application. Priority is claimed under 35 U.S.C. §119 and 37 CFR §1.55.

Respectfully submitted,

By: 
William B. Batzer
Registration N° 37,088

Intellectual Property Law Department
Schlumberger-Doll Research
36 Old Quarry Road
Ridgefield, Connecticut 06877-4108
(203) 431-5506

Date: MAY 21, 2004





USA



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

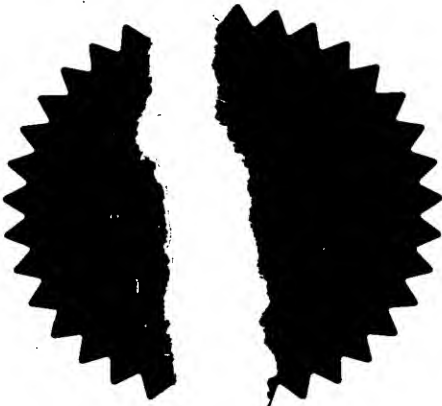

Signed

Dated 29 December 2003



A

THE PATENT OFFICE
M

14 DEC 2002

RULE 97
NEWPORT

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

57.0517 GB NP

2. Patent application number

(The Patent Office will fill in this part)

0229328.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Schlumberger Holdings Limited

P.O. Box 71

Craigmuir Chambers

Road Town

Tortola

British Virgin Islands

07236326001

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

British Virgin Islands

4. Title of the invention

SYSTEM AND METHOD FOR WELLBORE COMMUNICATION

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

William L WANG

Intellectual Property Law Department

Schlumberger Cambridge Research Limited

High Cross

Madingley Road

Cambridge CB3 0EL

United Kingdom

Patents ADP number (*if you know it*)

08256361001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

- Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 22 ✓

Claim(s) 7 ✓

Abstract 1 ✓

Drawing(s) 8 + 8 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 (plus 4 copies) ✓

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) 1 ✓

Any other documents -
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

13 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom


William L Wang
01223 325268

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



**Statement of inventorship and of
right to grant of a patent**

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	57.0517 GB NP
2. Patent application number <i>(if you know it)</i>	0229328.0
3. Full name of the or of each applicant	Schlumberger Holdings Limited
4. Title of the invention	SYSTEM AND METHOD FOR WELLBORE COMMUNICATION
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	The applicant and the inventors' employer are affiliated Schlumberger companies. The applicant derived the right to be granted a patent by virtue of agreement with the employer of the inventors.
6. How many, if any, additional Patents Forms 7/77 are attached to this form? <i>(see note (c))</i>	
7.	I/We believe that the person(s) named over the page <i>(and on any extra copies of this form)</i> is/are the inventor(s) of the invention which the above patent application relates to.
	<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> Signature  </div> <div style="text-align: center;"> Date 13 December 2002 </div> </div>
8. Name and daytime telephone number of person to contact in the United Kingdom	William L Wang 01223 325268

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

JENKINS, Charles Roderick
3 Berrycroft
Willingham
Cambridgeshire
CB4 5JX
United Kingdom

Patents ADP number (if you know it):

04811557001

JOHNSON, Ashley Bernard
Ravello
Butt Lane
Milton
Cambridgeshire
CB4 6DG
United Kingdom

Patents ADP number (if you know it):

08528333001

BARROW, Harry
Willow Corner
2 Cockerton Road
Girton
Cambridgeshire
CB3 0QW
United Kingdom

Patents ADP number (if you know it):

08527699001

Reminder

Have you signed the form?

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

BARRETT, Michael Paul
3 West Road.
Histon
Cambridgeshire
CB4 9LH
United Kingdom

Patents ADP number (if you know it):

07062128002

Patents ADP number (if you know it):

Reminder

Have you signed the form?

Patents ADP number (if you know it):



SYSTEM AND METHOD FOR WELLBORE COMMUNICATIONFIELD OF THE INVENTION:

5 The present invention relates to the field of
telemetry in oilfield applications. In particular, the
invention relates to an improved system and method for
communicating from downhole devices to the surface
without the use of cables.

10 BACKGROUND OF THE INVENTION:

In many areas of oil exploration and
development, communication between the surface and
downhole is vital but difficult. This is true from
drilling through to production and intervention in
15 existing wells. The typical problem is effecting a
channel of communication, by some method, down a long
conduit filled with fluid. In most situations, the
conduit (for example, the borehole) is considered the
only practical physical route for information, as
20 electromagnetic or elastic waves are strongly attenuated
by passage through thick layers of rock. Conventional
methods include pressure waves in the fluid (e.g. mud
pulse telemetry) or the use of electrical cables,
extending the length of the borehole. These conventional
25 methods have disadvantages, which include cost,
reliability, and low data rate.

Some ideas have been proposed around the idea
of sending some object or element up or down the
borehole. A raw piece of semiconductor memory onto which
30 data is written by a downhole device has been disclosed.
For example see, GB Patent Application 1 549 307. A more
sophisticated and robust vessel containing memory has

been disclosed by GB Patent No 2 352 041, and co-pending
US Patent Application Serial No. 10/049,749 assigned to
Schlumberger Technology Corporation. Alternatively, even
more complex vessels containing a variety of sensors and
5 data storage have been disclosed. For example, see GB
Patent 2 352 042, and co-pending US Patent Application
10/030,587 assigned to Schlumberger Technology
Corporation; and PCT Published Application WO 99/66172.

US Patent No. 6,443,228 discloses the use of
10 flowable devices in wellbores to provide communication
between surface and downhole instruments, among downhole
devices, establish a communication network in the
wellbore, act as sensor, and act as power transfer
devices. In some embodiments, the upwards communication
15 is proposed by writing information on the flowable
devices downhole which are bound for the surface.

Co-pending US Patent Application Serial No.
10/208,462, filed 30 July 2002, under obligation to
assign to Schlumberger Technology Corporation
20 (incorporated herein by reference) discloses a well
control system enabling the control of various downhole
well control functions by instructions from the surface
without necessitating the well or downhole tool
conveyance mechanism being equipped with electrical power
25 and control cables extending from the surface and without
the use of complex and inherently unreliable mechanical
shifting or push/pull techniques requiring downhole
movement controlled remotely from the surface. The
invention of this co-pending application makes use of
30 downhole well control apparatus that is response to
instructions from elements such as fluids or physical
objects such as darts and balls that are embedded with

tags for identification and for transmission of data or instructions. According to at least one disclosed embodiment, a downhole device may also write information to the element for return to the surface.

5 In these disclosed embodiments, where information is being sent from a downhole location to the surface, information is written to the device (or acquired by the device itself) downhole.

10 SUMMARY OF THE INVENTION:

 Thus, it is an object of the present invention to provide a system and method for upwards communication in a wellbore which is simple, robust, does not rely on cables extending from the downhole location to the surface, and does not require that the information being communicated be written downhole onto the elements or vessels being used for the communication. Thus the present invention addresses many of the difficulties associated with data transfer to separable elements in the downhole environment.

20 According to the invention a system is provided for communicating information from a downhole location in a hydrocarbon borehole to the surface. A plurality of releasable vessels are positioned at the downhole location, the vessels containing signal information affixed to the vessels prior to placement of the vessels downhole, and the signal information indicating the presence of at least one of three or more predetermined downhole conditions. A detecting system is positioned on the surface such that the signal information can be detected on one or more of the vessels. A processing system is located on the surface and is programmed to

establish the presence of the predetermined downhole condition based on the signal information.

A sensing and releasing system is preferably provided to sense the occurrence of the downhole condition, preferably a simple threshold, and release the vessels in response to the sensing. The vessels are preferably located at a number of downhole locations, and preferably are convected to the surface by the flow of wellbore fluids. The vessels preferably comprise one or more radio frequency devices that acquire substantially all energy needed for operation by exposure to externally created electromagnetic field, an example of such a device is an RF tag. The detection on the surface can be either "fly-by" or using a sieve in the flow line or in part of the oil-water separation system.

The predetermined downhole condition is preferably a characteristic of the fluid being produced in the borehole, such as water fraction. However according to alternative embodiments, the predetermined condition can also be a certain level of mechanical wear or damage to downhole equipment such as bit wear, or the firing of one or more charges on a wireline deployed perforation tool.

The present invention is also embodied in a method for communicating information to the surface from a downhole location in a hydrocarbon borehole.

As used herein the terms "vessel" and "element" to refer to a distinct physical entities that can be used in some way for conveying a signal. According to some embodiments, the vessel or element itself is the signal.

BRIEF DESCRIPTION OF THE DRAWINGS:

Figure 1 shows the mass of a silicon sphere, which would be moved upward by fluid flow, plotted against the productivity of a well;

Figure 2 shows the size necessary for 1 gram of silicon to be convected in the flow, computed as in Figure 1;

Figure 3 shows a system for communicating information from downhole to the surface, according to preferred embodiments of the invention;

Figure 4 shows further detail of one of the sensor/release mechanisms, according to a preferred embodiment of the invention;

Figure 5 shows a system for borehole telemetry during the drilling process, according to a preferred embodiment of the invention;

Figure 6 shows steps in communicating information from a downhole location to the surface, according preferred embodiments of the present invention;

Figure 7 shows a system for communication where the sensor/release mechanisms are placed behind wellbore liners, according to an embodiment of the invention; and

Figure 8 shows a perforation tool incorporating releasable vessels, according to a preferred embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION:

The inventors have recognized that prior known methods for upward communication using elements are prone

to the following types of practical problems to different degrees.

(1) Size, mass and transport. If objects are to move upward, against gravity, in a fluid-filled borehole they must either be buoyant, or experience enough fluid drag to move their mass. Buoyancy is not a solution in horizontal sections of wellbores. On the other hand, they need to be small enough to avoid blocking the borehole. Preferably they also need to be small enough to be used in large numbers, to give a reasonable chance of recovery. There are severe difficulties for complex, and therefore massive, objects. Not everything can be miniaturized by appealing to Moore's Law. (See Figure 1, described more fully below). Downward motion under gravity is easier, but fails in horizontal sections of the borehole.

(2) Power. Complex objects need stored energy (perhaps as batteries or capacitors) to perform complex functions such as sensing and radio communication. Power storage costs mass, bulk, longevity and reliability, especially in the downhole conditions encountered in the oilfield.

(3) Data transfer. The objects that have no sensors have to acquire their data from somewhere else, and many known techniques rely on physical connections via conductive media such as metal wires. Such connections are prone to problems of reliability in downhole conditions, and are vulnerable feed-throughs in the casing or encapsulation of the object that carries the data storage.

(4) Detection and recovery. Whether in drilling, production or intervention there is a practical

issue in locating the object and extracting the data from it. For example, in production there may be very high fluid flow rates at the surface, passing through vital chokes; any objects have to either pass through the
5 chokes and be detected afterwards, or else detected before the chokes and prevented from blocking or damaging them.

(5) Disposal. In general it is very undesirable to leave solid objects behind in oil wells at
10 any stage of their development, and even chemicals (especially radioactive ones) may pose problems. This has implications both for recovery, and also for control of buoyancy; jettisoning heavy parts may result in jamming or fouling elsewhere in the well.

15 Figure 1 shows the mass of a silicon sphere, which would be moved upward by fluid flow, plotted against the productivity of a well. Silicon is used here as an approximation to represent relatively closely packed electronic components. The fluid produced is
20 assumed to be largely water. The fluid velocities are calculated for various casing sizes. The solid line represents a 3 inch casing. The dotted line represents a 5 inch casing. The dashed line represents a 7 inch casing, which is fairly typical. The smaller sizes
25 correspond to typical production tubing diameters. The object has to move in the slowest section of the well and it can be seen that only very light objects will do this.

Figure 2 shows the size necessary for 1 gram of silicon to be convected in the flow, computed as in
30 Figure 1. The solid line represents a 3 inch casing. The dotted line represents a 5 inch casing. The dashed line represents a 7 inch casing. In Figure 2, the silicon has

been encapsulated in a low-density epoxy (0.5 gm / cc). It can be seen from Figure 2 that much more useful sizes are feasible, and in fact 1 gm will be an adequate mass for a simple read-only radio frequency tag. The lines
5 become horizontal when no encapsulation is necessary for the object to move.

5 In a producing oilwell, small amounts of data can be very useful, most especially if they are referred to accurately-known positions in the well. Sophisticated
10 production logging tools can measure many parameters of a flowing well, but a log is expensive, disruptive, and is sometimes hazardous to perform. In many cases the properties of a reservoir, penetrated by a well, will be fairly accurately known. Remedial actions, to improve
15 productivity, can then be taken on the basis of relatively simple data. For example "threshold" data can be very valuable, such as information that the water fraction or pressure has exceeded a critical value at a certain position. Conveying information about several
20 thresholds would be even more valuable. The generic data to be conveyed is then simply the pair (X, Y), where X encodes position and Y encodes a threshold. X and Y need not be numbers - for example, X could be encoded by one radioactive tracer in the flow, and Y by another. The
25 key concept is that data transmission is achieved by placing, in advance, vessels or elements to convey pre-determined signals (X, Y) at well-defined positions in the well. Preferably associated with these placements of vessels or elements are fixed sensors, power supplies,
30 and means of release. When the condition associated with Y is measured at position X, the signal (X, Y) is released. Upon detection and recovery of the vessel at

surface, the attached signal can be decoded by reference to the "code book" describing how the signaling system was originally set up.

According to the invention, this relatively
5 simple scheme allows the use of extremely simple signaling methods, and advantageously does not rely on data transfer downhole into whatever vessel or element we choose to carry, or to be, the signal. This advantageously eliminates a technically difficult and
10 unreliable step.

Figure 3 shows a system for communicating information from downhole to the surface, according to preferred embodiments of the invention. The system generally comprises downhole sensors and associated
15 release mechanisms 22, vessels 60, and surface detection system 24. There are four sensor/release mechanisms 22, numbered 50, 52, 54 and 56, positioned in the lower end of well 16. Well 16 is producing hydrocarbons from reservoir region 14 in the earth 12. The vessels 60 are
20 constructed to have a high probability of surviving downhole pressures and temperatures, and will be carried to the surface reliably by the flowing liquids in the well 16. As is described more fully herein, the vessels 60 are released from the sensor/release mechanisms 22 in
25 appropriate batches in accordance with a pre-determined program. Surface detection system 24 detects and/or recovers, and interpret the signals conveyed by vessels 60.

Figure 4 shows further detail of one of the
30 sensor/release mechanisms, according to a preferred embodiment of the invention. Downhole sensor 110 is adapted to sense a downhole condition, for example

pressure, temperature, fluid composition (such as water), and/or flow rates. Sensors of these types are well-understood technology, as are the high-temperature batteries that are preferably used to power the sensors.

5 Alternatively, other sources of power can be provided, such as small turbines or oscillating magnetic floats forming a primitive generator. Sensor 110 is in communication with processor 56 which may comprise a number of microprocessors. Nests 112 and 114 contain

10 vessels 130 and vessels 140 respectively. Associated with nests 112 and 114 are release mechanisms 116 and 118. Under control of processor 122, release mechanisms 116 and 118 can be fired. The firing mechanism may be an actual detonation of a small explosive charge, exposing

15 the vessels to the flow; or it may operate by undoing a small latch, which restrains a spring-loaded hatch; or some combination of these methods. Release mechanisms 116 and 118 are instructed to release the vessels in accordance with a program in processor 122. According to

20 a preferred embodiment, release mechanism 116 is instructed to release all of the vessels 130 in nest 112 when a predetermined threshold is met by sensor 110. For example this could be a certain temperature or pressure sensed by sensor 110. Likewise, release mechanism 114 is

25 instructed to release all of its vessels 140 when a different predetermined threshold is met by sensor 110.

According to a preferred embodiment, the sensor/release mechanism 56 is positioned at a known position in the well. This known position is encoded in

30 all the vessels 130 and 140 contained in each of the nests 112 and 114 respectively. The encoding may be made by many different methods, but it should be made such

that when detected on the surface, it can be determined from which location the vessel came from.

The signaling method for the vessels will now be described in further detail. The preferred vessels
5 use radio frequency (RF) tags. RF tags are described in some detail US Patent Application Serial No. (25.200) (hereinafter "Thomeer"), for a communication task
involved in downhole intervention. Thomeer discloses circulating read-write tags up and down the borehole, but
10 for the signaling task of the present invention the much simpler read-only (RO) tags are preferably used. Furthermore, the RO-RF tags are preferably designed such that they are only intended to be used once.

The preferred RO-RF tags are tiny electronic
15 circuits that, for purposes of the present invention, have the following characteristics:

- (1) They are transponders that emit a unique
signal (typically electromagnetic, at radio frequencies) when interrogated by another electromagnetic signal;
20 (2) They acquire all necessary power from the interrogating electromagnetic field - preferably, no conductive connection is ever required; and
(3) They are small, light and relatively
inexpensive.

25 An example of suitable RO-RF tags are those used as retail anti-theft tags, which is simply a loop antenna tuned to a definite frequency. The interrogating field sees a strong reflection from the antenna, whose presence is simply the signal one is looking for.
30 According to another embodiment, more elaborate tags contain serial numbers, imprinted in the tags at manufacture. Such serial numbers would be good

candidates for matching up with the (X, Y) pairs described above. In that notation, every tag deployed at the same position would have the same X-value. The Y-element of the tag would not be needed, if tags were
5 intended for release at just one threshold. Of course there could be different thresholds at different locations, or a set of thresholds, as in the example described above with respect to Figure 4.

According to another embodiment, the RF tag
10 uses a range of resonant frequencies to form the elements of a coding alphabet.

The preferred signaling system uses RO-RF tags encapsulated in low-density epoxy. By choice of materials, one can obtain a vessel that will be dragged
15 along even at low fluid speeds (less than 0.1 m/s). It is preferable to ensure that the vessel is not too buoyant, as it may become trapped against obstacles on the "roof" of horizontal sections of the wellbore. On the other hand it must be light enough to be lifted by
20 the flow, and not so small that it becomes becalmed in beds of detritus, stagnant layers or eddies. Due to these considerations it has been found that a spherical shape approximately one centimeter in diameter is suitable, depending in the particular materials used.
25 However in relatively low flow situations, as shown in Figure 2, larger vessels are preferred. Thus in low flow applications a vessel size up to two centimeters is preferred. Other shapes that have also been found to be effective include hollow cones (like badminton
30 shuttlecocks) or spheres with long tails, like kites. These more complex shapes offer a better drag/mass ratio, and additionally offer space to place longer antenna than

can be fitted in the tags themselves. This increases the detectability of the tags. On the other hand, the simple sphere is less likely to become snagged or entangled.

According to another embodiment, the tags are
5 contained in hollow spheres, and maintained at ordinary
(atmospheric) pressures. This gives buoyancy in a
57 natural way and reduces some manufacturing problems posed
by encapsulation to resist downhole pressures. The
vessels are preferably made strong enough to resist
10 implosion and light enough to move in the flow.
Additionally, they have to be made of non-conductive
materials (or else RF communication through them becomes
impossible). Ceramic materials, such as zirconia or
alumina, may be used in this application but are more
15 expensive and more difficult to machine.

According to the invention, further detail will
now be provided regarding the programming of the release
strategy for the vessels. The strategy is decided in
advance, when the "nests" are deployed in the borehole.
20 The simplest strategy, as noted, is to release a nest of
vessels when some physical variable passes a
predetermined value. The controlling processor
preferably has a provision, in processing the sensor data
that ensures the threshold has not been passed because of
25 a one-off noise spike. In this case the only signal to
be decoded, on recovery at surface, would correspond to
the position in the well from which the vessel
originated.

According to another embodiment, a more complex
30 strategy is provided that includes a set of release
thresholds that is different for each location.
Additionally, releases can be programmed to happen when

the variable being sensed changes more quickly than a predetermined rate.

Referring again to Figure 3, the surface detection system 24 will now be described. The fluid being produced in well 16 reaches the surface 10 via production tubing 20. Near the surface 10 are two safety valves 30 and 32. On the surface, the produced fluid flows through flow line 26, through choke valves 34 and 36 and then into oil/water separation system 40. Choke valves 34 and 36 are the primary means for controlling the pressure in the well 16. After separation, the oil component is carried via pipe 42 to subsequent surface production and/or refining equipment.

Detection, interrogation and recovery of tags when they reach the surface will now be described. According to a preferred embodiment, the tags within vessels 60 are detected on the surface by tag detector 70 as they move along with a high-speed, high-pressure flow, just before they reach the chokes 34 and 36. In Figure 3, vessel 62 is shown passing up production tube 20 and vessel 64 is shown passing by detector 70. The detector 70 transmits the detected information to surface processing system 72. Because the chokes are so vital to well control, it is preferred to recover the vessels before the chokes.

The tags within the vessels act as transponders of RF electromagnetic radiation which is directed into the flowline 26 by internal antenna contained in detector 70. Since flowline 26 is made of a conductive metal, it functions as a waveguide. The wavelengths used in commercially available RF tags are well above the cutoff wavelength of typical size of flowline 26, and so the

interrogating radiation will not propagate more than about the pipe diameter. Therefore in order to detect the tags within the vessels as they "fly by" the detector 70, preferably a relatively large number of vessels are released together, and the antennae of detector 70 in the pipe are large and/or numerous enough to ensure an adequate volume of investigation.

According to an alternative preferred embodiment the vessels are stopped, by means of a series of sieves 74 which form part of detector 70. The sieves 74 preferably form part of the interrogating antenna. Once a vessel has been stopped, such as vessel 64, the tag residing in vessel 74 is detected and interrogated by detector 70. Following detection, the vessels are preferably be disabled as otherwise the accumulation of tags on the sieve will lead to difficulties in reading them uniquely. This is preferably achieved by delivering a pulse of RF power from detector 70, of sufficient intensity to destroy a component in the tag. This technology is commercially available and is used to disable some types of retail alarm tags once payment has been made for the item to which they are attached.

The antennae on tags are much smaller than a wavelength and so they have the reception pattern of a dipole. This means that they cannot respond to radiation coming from some directions. The interrogating antenna therefore should be designed to deal with this polarization effect, preferably by being arranged to produce all three directions of the electric or magnetic field that may couple to the antenna.

After some time in operation it becomes necessary to clean or renew sieves. At stage, bypass

pipework, not shown, is preferably used to maintain flow from the well, while the sieving section is removed and maintained.

According to an alternative embodiment, the
5 vessels are made small enough to pass easily through choke valves 34 and 36, and pass into the oil/water separation system 40. Vessels 66 and 68 are shown thus in Figure 3. The vessels are detected in the somewhat more quiescent environment of the separating system 40 using a system
10 with an interrogating antenna similar to that described above. Since fluids have a relatively long residence time in separation system 40, time is not a problem in detecting the tags. Due to the relatively large volume of investigation, and high attenuation of radio
15 frequencies by salt water, it is preferred that quite powerful transmitters be used to search the whole volume of a separator.

Note that although the example of Figure 3 shows a land production site, the invention is also
20 applicable to offshore and transition zone wells. In the case of marine applications, where the flowlines from multiple wells are typically combined on the seabed, it is preferable to have the detecting systems mounted upstream from the confluence to more easily detect from
25 which well the vessel originated. Even more preferably, the detecting system is mounted below the Christmas tree to avoid the vessels passing through the Christmas tree valves.

According to the invention, alternative
30 embodiments to the use of read-only RF tags will now be described in further detail.

According to one embodiment, microdots are used as the vessels. Microdots are tiny plastic particles which have serial numbers written on them. They are small enough to be incorporated into paint, for example.

5 Very large numbers could be released into the flow, as described for RF tags, and they are small enough to be certain to be carried up the borehole. They are also small enough to pass through the chokes with no risk. Recovery is more difficult than with RF tag vessels.

10 Regular samples of fluids are preferably taken from the separation system 40 and examined under a microscope. An alternative is to encapsulate the microdot together with a simple dipole antenna, a loop for example; the combined device then becomes functionally similar to an RO RF tag, 15 in that the microdot contains the signal information and the loop is used to detect the presence of the vessel. The dipole loop is preferably designed to reflect radio energy at a certain predetermined frequency through resonance.

20 Alternatively a dipole without the microdot can be used as the vessel. The dipole is preferably tuned to one of a range of frequencies. This gives a simple alphabet for signaling. Multiple dipole antennae tuned to reflect different predetermined frequencies can be 25 combined into a single vessel, or could each be in separate vessels, but released in combination to produce the signal information.

Such simple dipole antenna have the advantage of relatively short response times compared with 30 conventional RF tags and therefore are preferred in use on "fly-by" read embodiments where detection is accomplished without the use of sieves or screens.

According to another embodiment, a combination of signaling techniques are used. For example, radioactive tracers can be used to signal that microdots were about to arrive. This type of combination would
5 have advantages when the "arrival" signal was cheap and easy to detect, and heralded the arrival of very
informative entities, which were not so easy to locate without mobilizing special resources.

According to other embodiments, the signaling
10 techniques describe above is used to convey information not relating to parameters of the fluids in a producing oil well. For example, signaling of mechanical damage or wear in an oil well is simply achieved by the techniques described above, by embedding vessels at points in
15 machinery where they will naturally be released if there is excessive wear or damage at that point.

Figure 5 shows a system for borehole telemetry during the drilling process, according to a preferred embodiment of the invention. Drill string 258 is shown
20 within borehole 246. Borehole 246 is located in the earth 12 having a surface 10. Borehole 246 is being cut by the action of drill bit 254. Drill bit 254 is disposed at the far end of the bottom hole assembly 256 that is attached to and forms the lower portion of drill
25 string 258. Bottom hole assembly 256 contains a number of devices including various subassemblies 260 including those used for measurement-while-drilling (MWD) and/or
logging-while-drilling (LWD). Information from
subassemblies 260 is communicated to a Pulser assembly
30 266 which converts the information into pressure pulses for transmission to the surface through the drilling mud as is known in the art.

The drilling surface system includes a derrick 268 and hoisting system, a rotating system, and a mud circulation system. Although the drilling system is shown in Figure 5 as being on land, those of skill in the art will recognize that the present invention is equally applicable to marine environments.

The mud circulation system pumps drilling fluid down the central opening in the drill string. The drilling fluid is often called mud, and it is typically a mixture of water or diesel fuel, special clays, and other chemicals. The drilling mud is stored in mud pit which is part of the mud separation and storing system 278. The drilling mud is drawn in to mud pumps (not shown) which pump the mud through stand pipe 286 and into the Kelly and through the swivel.

The mud passes through drill string 258 and through drill bit 254. As the teeth of the drill bit grind and gouges the earth formation into cuttings the mud is ejected out of openings or nozzles in the bit with great speed and pressure. These jets of mud lift the cuttings off the bottom of the hole and away from the bit, and up towards the surface in the annular space between drill string 58 and the wall of borehole 246.

At the surface the mud and cuttings leave the well through a side outlet in blowout preventer 299 and through mud return line 276. Blowout preventer 99 comprises a pressure control device and a rotary seal. The mud return line 276 feeds the mud into the separation and storing system 278 which separates the mud from the cuttings. From the separator, the mud is returned to the mud pit for storage and re-use.

According to the invention vessels 60 are embedded behind the cutters of the drill bit 254, such that they are released when the cutters break. Vessels 60 are also nested in part of subassemblies 260 such that they are released when a predetermined event occurs. In this embodiment, microdots are the preferred type of vessel due their ruggedness and relatively small size.

Figure 7 shows a system for communication where the sensor/release mechanisms are placed behind wellbore liners, according to an embodiment of the invention. According to this embodiment, sensor/release mechanisms 84, 86 and 88 are placed behind slotted expandable liner 82 in the producing zone of well 16 within reservoir region 14. The vessels 60, shown flowing into and through production tubing 20, are selectively released when erosion of the liners becomes severe. In this embodiment, microdots are preferred as vessels 60 due to their relative robustness and small size.

Figure 6 shows steps in communicating information from a downhole location to the surface, according preferred embodiments of the present invention. In step 300 the predetermined signal information is affixed to the vessels. This is done at the surface using one or more of the techniques described above, (e.g. RF tags, dipole antennae, microdots, etc.). In step 310 the vessels having the signal information already written to them are placed downhole at a plurality of locations. The locations are preferably predetermined and correspond to the signal information as has been described above. In step 312 some of the vessels are released upon the occurrence of a predetermined event. In step 314 the vessels travel to

the surface preferably by convection. In step 316, at the surface, the signal information is detected using the detection system(s) described herein. In step 318 the signal information is decoded, preferably in a processor
5 such as a computer system programmed for the decoding. Based on the decoding, the processor establishes the presence of the downhole condition - such as a certain threshold measurement being reached by a sensor at a particular location in the wellbore. In step 320, one or
10 more surface operating parameters are altered in response to the known downhole condition. For example, if the downhole condition is water fraction above a certain amount at a particular location, downhole valves are preferably used to control the production to maximize
15 produced oil while minimizing produced water.

Figure 8 shows a perforation tool incorporating releasable vessels, according to a preferred embodiment of the invention. Perforation gun 150 is suspended from wireline 154. The perforation gun 150 comprises
20 essentially a plurality of shaped charges mounted on the gun frame. One of the charges 156 is shown in Figure 8 firing. The firing charge produces a perforation through the casing 152 and into the reservoir region 14 in the earth 12. According to the invention, a sensor/release
25 mechanisms 160 and 162 are provided to detect the firing of each shaped charge and release vessels to communicate to the surface that the charge was properly fired. In Figure 8, sensor/release mechanism 160 is shown releasing vessels 60. According to an alternative embodiment, the
30 vessels are incorporated into the charges themselves, such that they are automatically released when the charge is fired. In both of these embodiments, the preferred

vessel is a microdot, due to its relative size and robustness.

While the invention has been described in conjunction with the exemplary embodiments described above, many equivalent modifications and variations will be apparent to those skilled in the art when given this disclosure. Accordingly, the exemplary embodiments of the invention set forth above are considered to be illustrative and not limiting. Various changes to the described embodiments may be made without departing from the spirit and scope of the invention.

CLAIMS

What is claimed is:

5 1. A system for communicating information from a downhole location in a hydrocarbon borehole to the surface comprising:

 a plurality of releasable vessels positioned at the downhole location, the vessels containing signal information affixed to the vessels prior to
10 placement of the vessels downhole, and said signal information indicating the presence of at least one of three or more predetermined downhole conditions;

 a detecting system on the surface positioned
15 and adapted to detect the signal information on one or more of the vessels; and

 a processing system on the surface programmed to establish the presence of the predetermined downhole condition based on the signal information.
20

2. A system according to claim 1 further comprising a releasing system adapted to release the vessels at the occurrence of a predetermined event.

25 3. A system according to claim 2 further comprising a sensor in communication with the releasing system adapted to sense downhole conditions and wherein the releasing system releases the vessels when the predetermined event is indicated by the sensor.

30 4. A system according to claim 3 wherein the predetermined event is met when a value sensed by the

sensor reaches a predetermined threshold value, and the predetermined downhole condition is the sensing of the predetermined threshold value at the location of the sensor.

5

5. A system according to claim 1 wherein a plurality of vessels are placed at a plurality of predetermined positions in the borehole.

10

6. A system according to claim 1 wherein the signal information is sufficient to determine at the surface (1) a value sensed by a sensor and (2) a location where the value was sensed.

15

7. A system according to claim 1 wherein the vessels are adapted to be convected to the surface by the flow of fluids in the borehole.

8. A system according to claim 1 wherein each of
20 the vessels are sealed in a non conductive medium.

9. A system according to claim 1 wherein the vessels each comprise one or more radio frequency devices that acquire substantially all energy needed for
25 operation by exposure to externally created electromagnetic field.

30

10. A system according to claim 9 wherein the radio frequency devices are RF tags.

11. A system according to claim 10 wherein the RF tags are read-only.

12. A system according to claim 9 wherein the radio frequency devices are simple dipole antennae.

5 13. A system according to claim 12 wherein each of the vessels comprises a plurality of dipole antennae each tuned to resonate at a different frequency, and the signal information being contained in the combination of frequencies.

10

14. A system according to claim 1 wherein the vessels are spherical in shape.

15 15. A system according to claim 14 wherein the vessels are at most 2 centimeters in diameter

20

16. A system according to claim 10 wherein the vessels are hollow and an RF tag is positioned inside each vessel.

17. A system according to claim 16 wherein the vessels are filled with a fluid.

25 18. A system according to claim 10 wherein each vessel is primarily solid epoxy surrounding the RF tag.

19. A system according to claim 1 wherein the vessels is cone shaped.

30 20. A system according to claim 1 wherein the vessels are kite shaped.

21. A system according to claim 1 wherein the detection system is adapted to detect the presence of the vessels as the vessel fly by through a tube containing fluid produced form the borehole.

5

22. A system according to claim 21 wherein the detection system is adapted to detect the signal information as the vessel fly by through a tube containing fluid produced from the borehole.

10

23. A system according to claim 1 wherein the detection system comprises a sieve or filter.

24. A system according to claim 1 wherein the
15 detection system is adapted to retrieve the vessels from a surface separations system for separating oil and water.

25. A system according to claim 1 wherein each
20 vessel comprises at least one microdot.

26. A system according to claim 25 wherein each vessel further comprises at least one radio frequency device that acquire substantially all energy needed for
25 operation by exposure to externally created electromagnetic field.

27. A system according to claim 26 wherein the radio frequency device indicates to the presence of the
30 vessel to the detecting system and the microdot indicates the signal information to the detecting system.

28. A system according to claim 1 wherein the at least one predetermined downhole condition is a characteristic of fluid being produced from the borehole.

5 29. A system according to claim 1 wherein the at least one predetermined condition is predetermined fraction of water sensed at a particular location.

10 30. A system according to claim 1 wherein the at least one predetermined condition is a predetermined level of mechanical wear or damage to equipment located downhole.

15 31. A system according to claim 30 wherein the at least one predetermined condition is a predetermined level of mechanical wear or damage to a drill bit.

20 32. A system according to claim 30 wherein the at least one predetermined condition is a predetermined level of erosion of a slotted and/or expandable wellbore liner.

25 33. A system according to claim 1 wherein the releasable vessels are positioned on a wireline tool.

30 34. A system according to claim 1 wherein the releasable vessels are positioned on a perforation tool and the at least one predetermined downhole condition is the firing of at least one charge on the perforation tool.

35. A method for communicating information to the surface from a downhole location in a hydrocarbon borehole comprising the steps of:

5 positioning a plurality of releasable vessels at the location downhole, the releasable vessels including signal information affixed to the vessels prior to placement of the vessels downhole, and said signal information indicating the presence of a predetermined downhole condition;

10 detecting on the surface the signal information on one or more of the vessels;

establishing the presence of the predetermined downhole condition based on the detected signal information.

15

36. A method according to claim 35 further comprising the step of releasing the vessels at the occurrence of a predetermined event.

20

37. A method according to claim 36 further comprising the step of sensing the predetermined downhole condition and wherein the vessels are released when the predetermined event is sensed.

25

38. A method according to claim 37 wherein predetermined event is met when a value sensed reaches a predetermined threshold value, and the predetermined downhole condition is the sensing of the predetermined threshold value at the location where the sensing takes place.

30

39. A method according to claim 35 wherein the vessels each comprise one or more radio frequency devices that acquire substantially all energy needed for operation by exposure to externally created
5 electromagnetic field.

40. A method according to claim 39 wherein the radio frequency devices are simple dipole antennae.

10 41. A method according to claim 35 wherein the vessels are at most 2 centimeters in diameter.

42. A method according to claim 35 the step of detecting comprises detecting the signal information as
15 the vessel flows through a tube containing fluid produced from the borehole.

43. A method according to claim 35 wherein each vessel comprises at least one microdot.
20

44. A method according to claim 35 wherein the predetermined downhole condition is a characteristic of fluid being produced from the borehole.

25 45. A method according to claim 35 wherein the predetermined condition is a predetermined level of mechanical wear or damage to equipment located downhole.

46. A method according to claim 35 wherein vessels
30 are positioned on a perforation tool and the predetermined downhole condition is the firing of one or more charges on the perforation tool.

ABSTRACT

A method and system is disclosed for communicating information from a downhole location to the surface. A plurality of releasable vessels are positioned downhole, each containing signal information affixed to the vessels prior to placement of the vessels downhole. The signal information indicates the presence of at least one of three or more predetermined downhole conditions. A detecting system is positioned on the surface such that the signal information can be detected on one or more of the vessels. The predetermined downhole condition can be characteristic of the fluid being produced in the borehole, such as water fraction, a certain level of mechanical wear or damage to downhole equipment such as bit wear, or the firing of one or more charges on a wireline deployed perforation tool.

A sensing and releasing system is described that senses the occurrence of the downhole condition, such as a simple threshold, and release the vessels in response to the sensing. The vessels are located at a number of downhole locations, and travel to the surface via convection. The vessels include a radio frequency devices that acquires substantially all energy needed for operation by exposure to externally created electromagnetic field, such as an RF tag or simple dipole antenna.

1/8

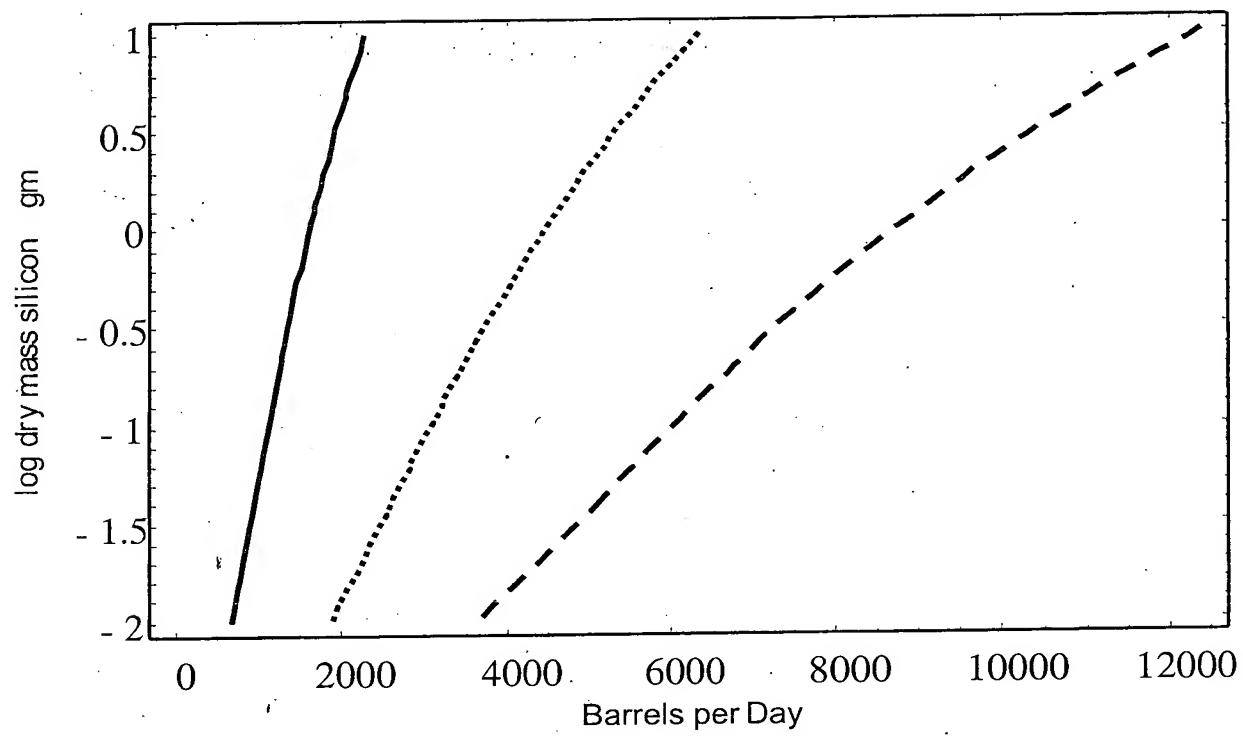


Figure 1

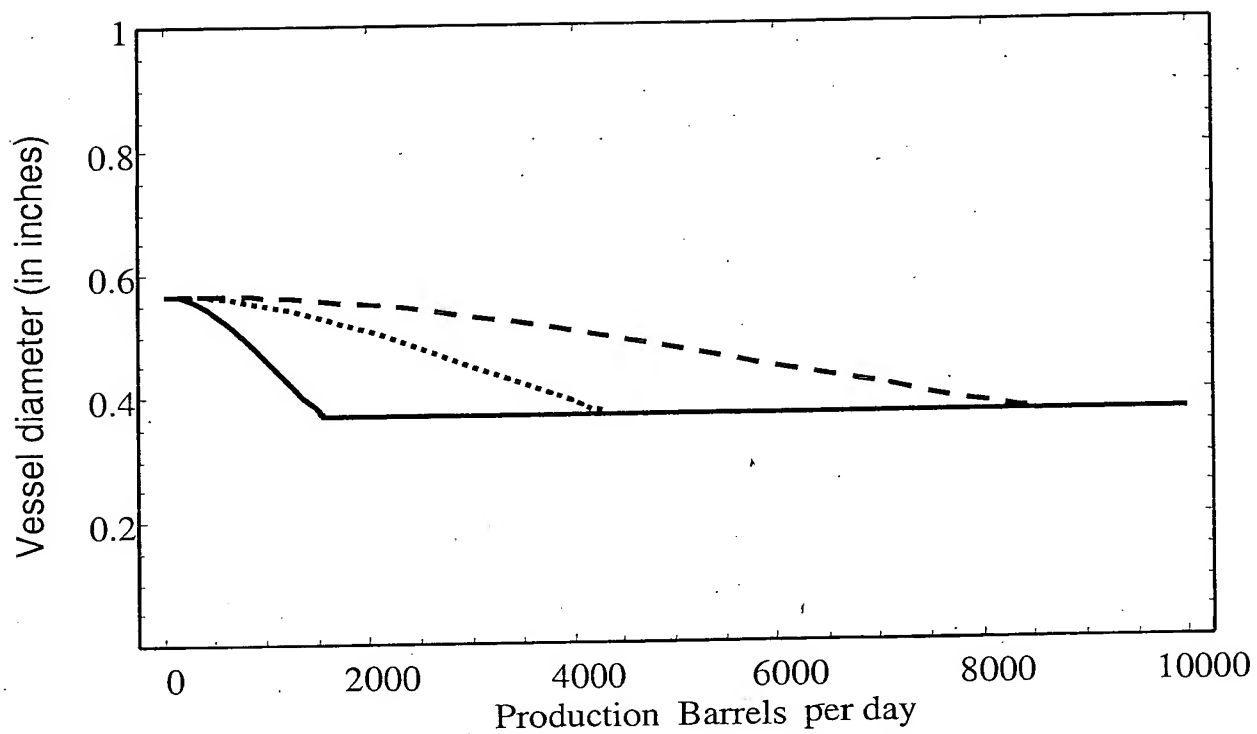


Figure 2



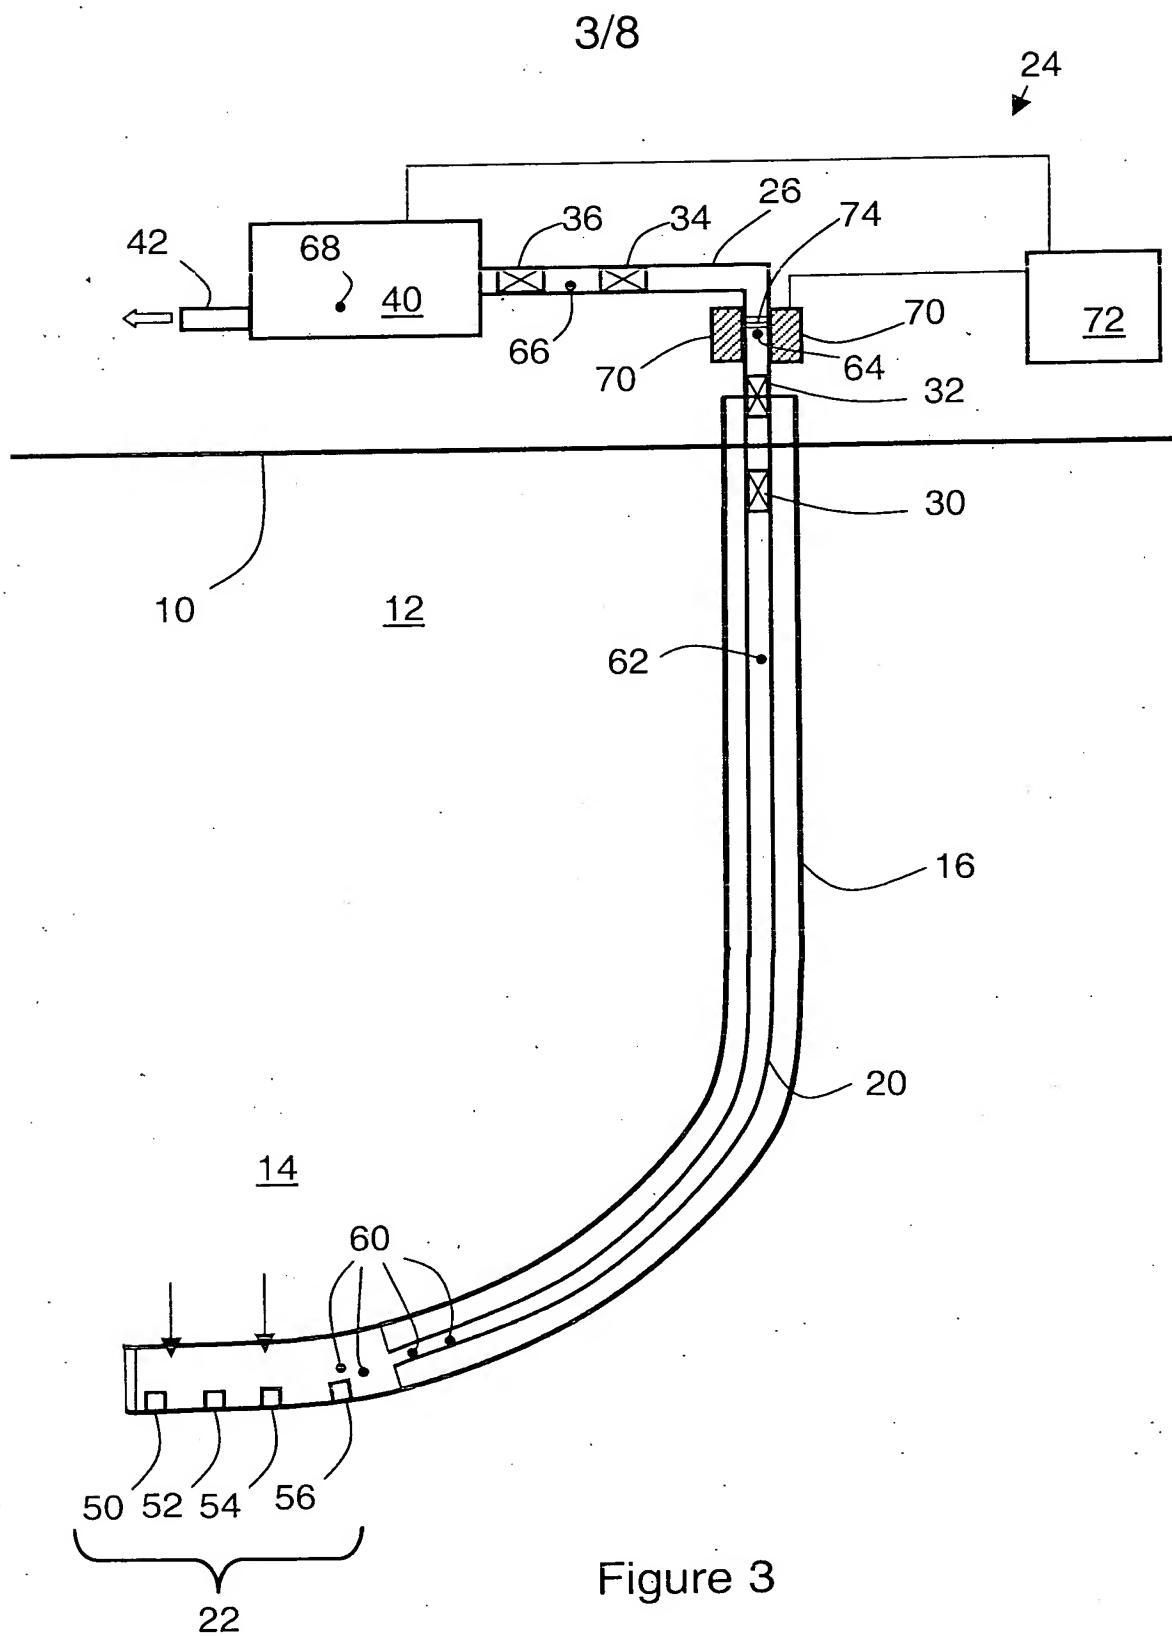


Figure 3



4/8

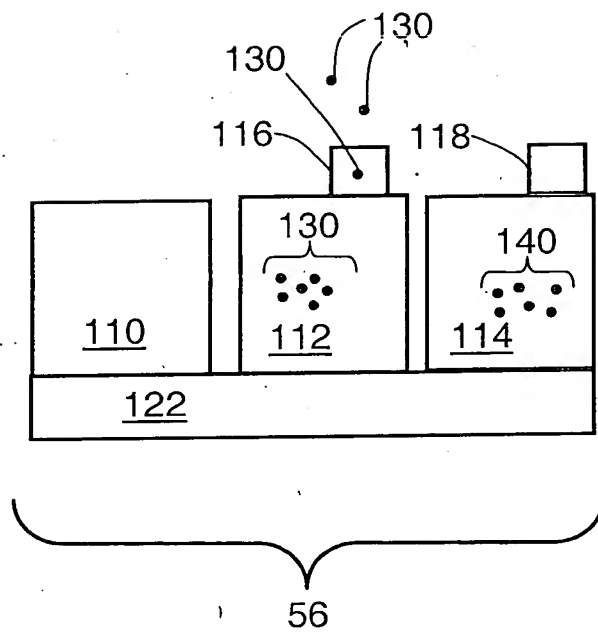


Figure 4



5/8

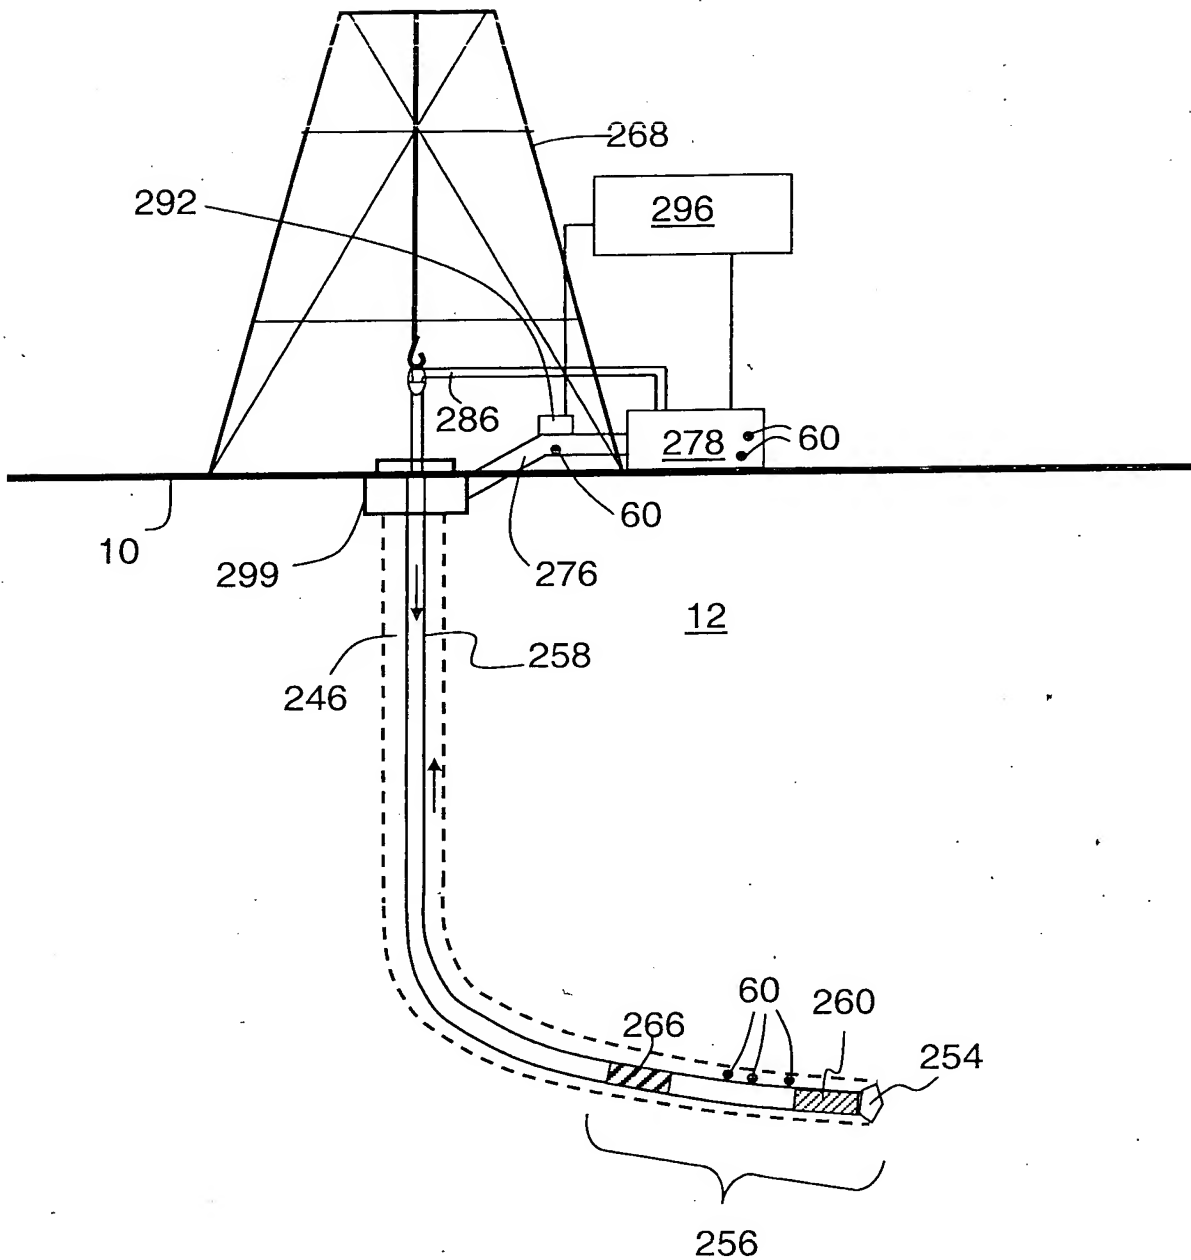


Figure 5



6/8

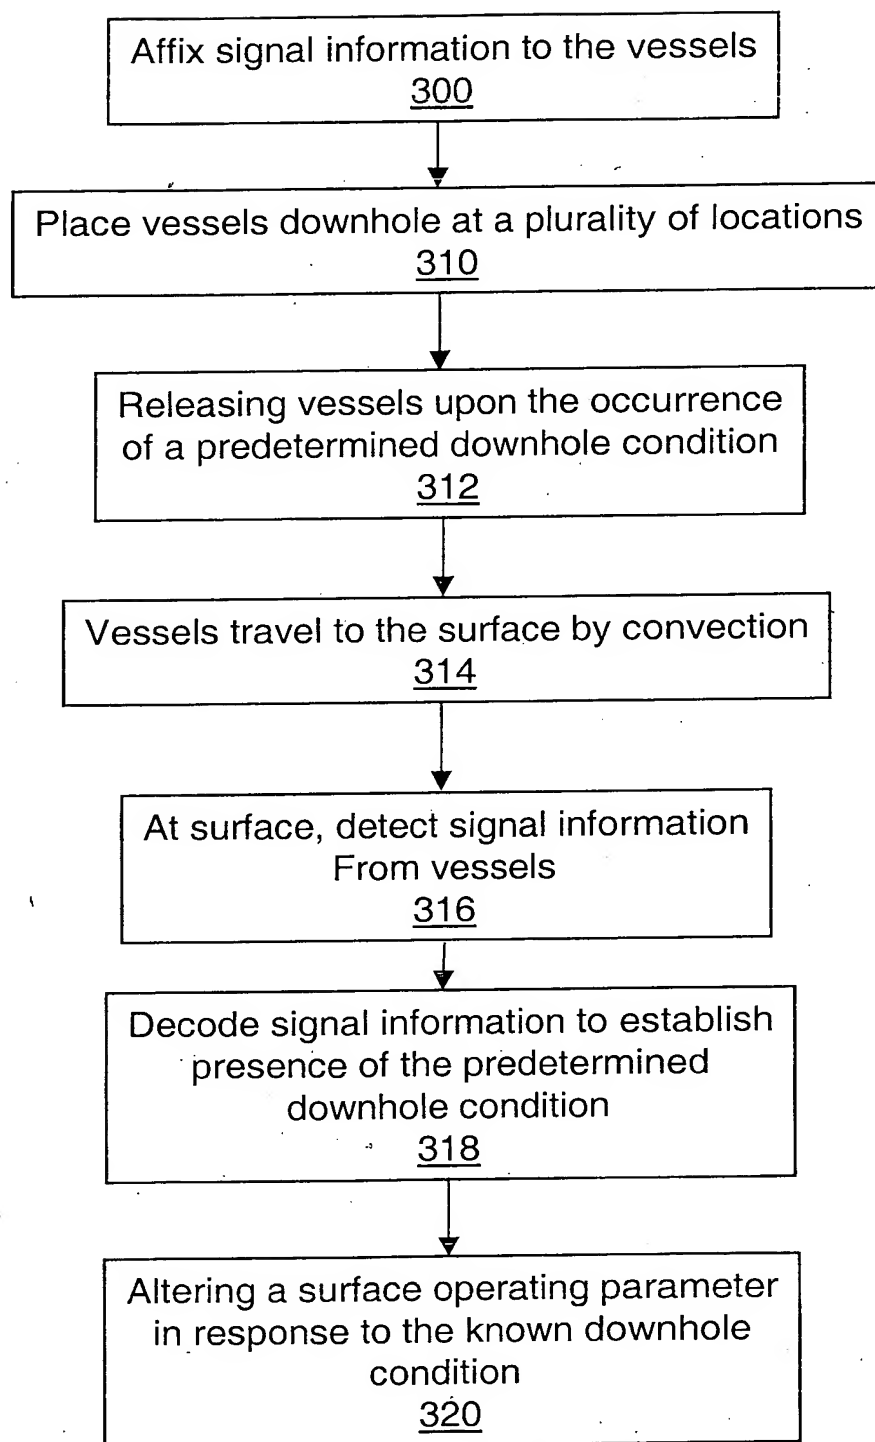


Figure 6

7/8

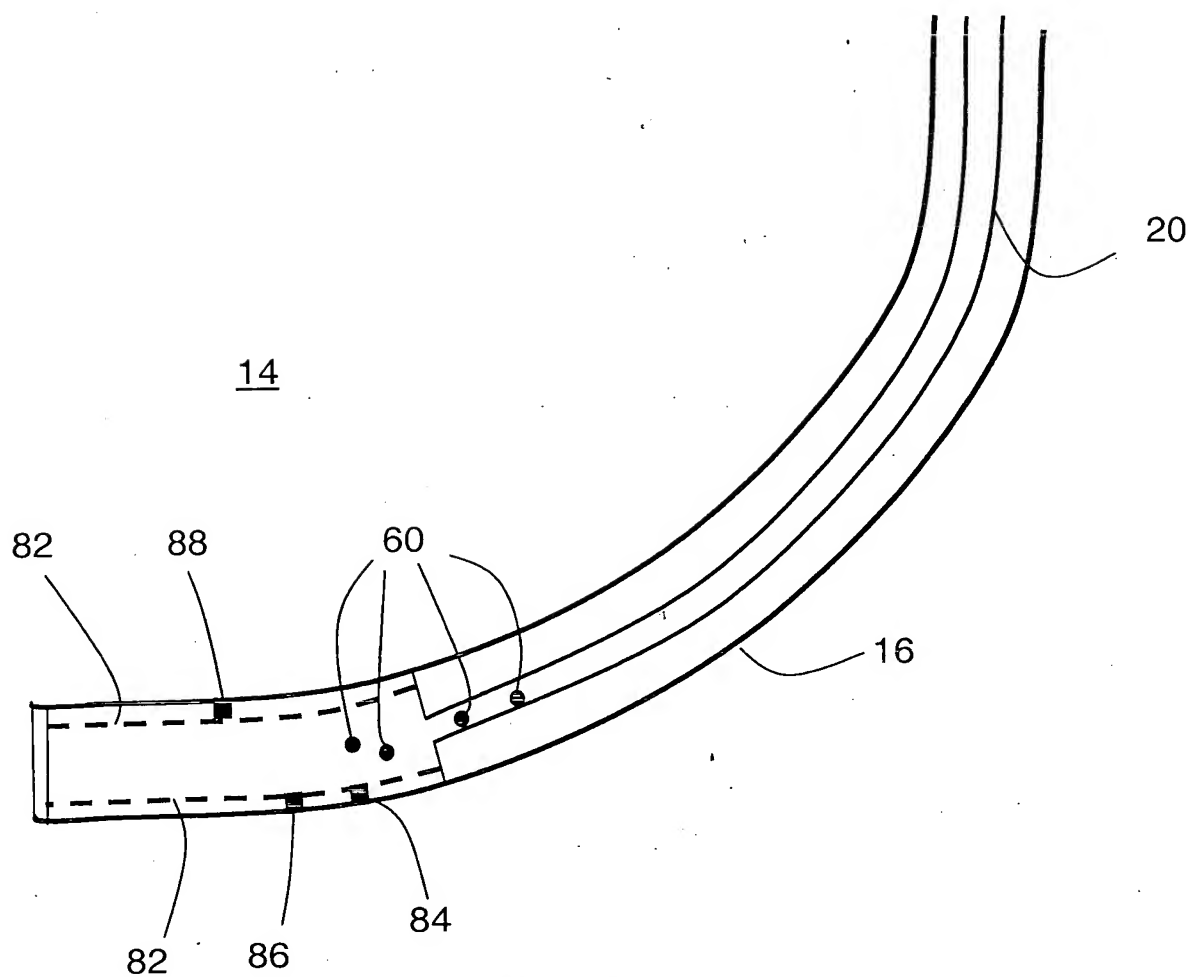


Figure 7



8/8

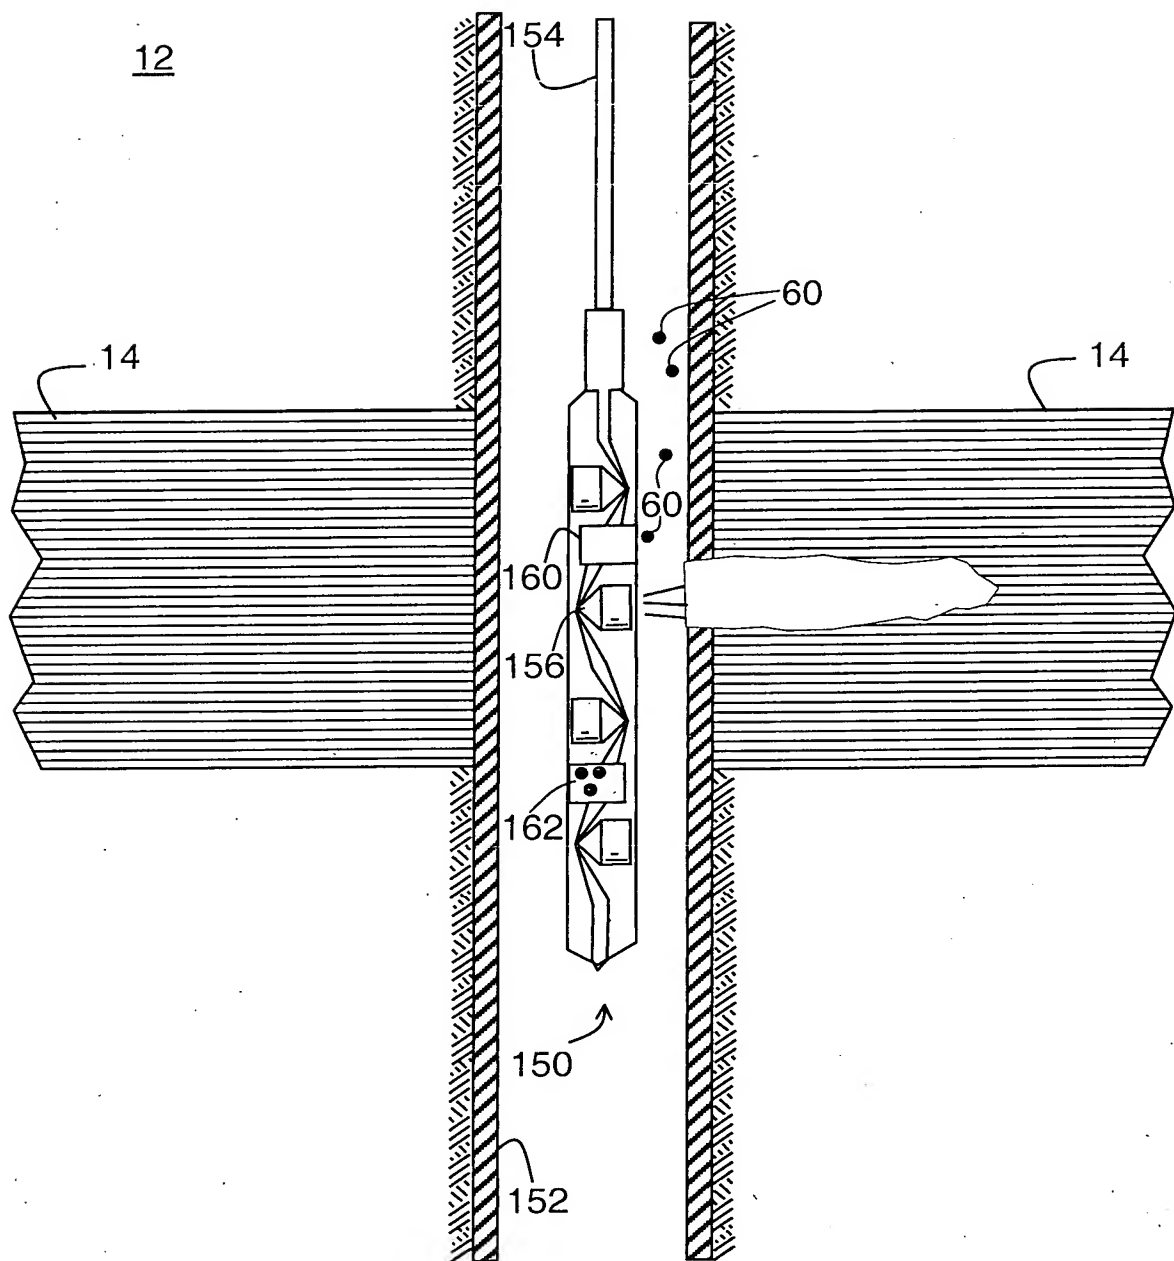


Figure 8

THIS PAGE BLANK (USPTO)
